

APD 2100 M

Mitsubishi

D+' &'



ISO8528

GC',)&-

SZUTEST

GC' - \$\$\$%



2000/14/EC

&\$\$\$#(#

z) \$' z'z' D:

	"	"	"	"	Amp
400/230	2100,00	1680,00	1875,00	1500,00	2709,00

fPGE'

'GC',)&

,) & z

fDF DE'

%\$!

%

%&

'GC' \$(**

z&('

'GC

Standard Specifications

z

fl

!

z

1

TRANSFER SWITCH

APD 2100 M

Mitsubishi


D+' &''

Manufacturer		Mitsubishi
Model		S16R-PTA2
		% \$\$\$' "# "
		%+- \$\$\$' "
		Q' -- \$\$\$< DQ
	L	65,370
	"	170x180
		13,5:1
	fl # 7	"# " 1500
	fl 7	L 230,00
		L 445,00
AbsorbedAirDischargeReSourceKey.Text	' # "	143,00
	' # "	2040,00
	° C	379,00
		24 V d.c.
	Load	%%\$!\$
	# "	
		406,10

		ECO46-1L/4
	Hz	50
	"	2100,00
7cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 2100 M	14850,00	5200,00	2500,00	2900,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 99	20100	9000	2800	3300/4800	2200

D+' &''

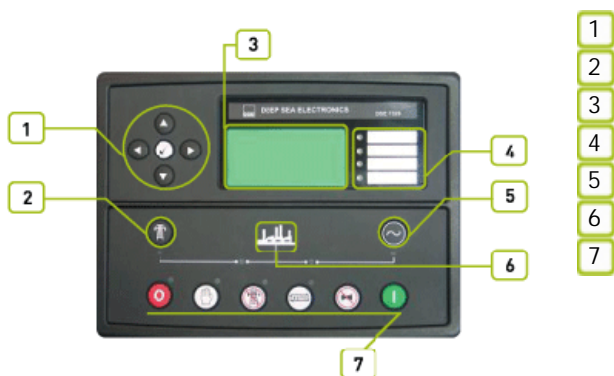

APD 2100 M

Mitsubishi

D+' &'

1

'8G9ž + ' &\$ž)5ž&&\$#&(\$

2

3

4

'8G9+' &\$ ž fi
&&\$ ž
"8G9+' &\$ ž
'8G9+' &\$ ž
ž
% &I '* (ž
žFG&' &žFG(,) ž
ž

APD 2100 M

Mitsubishi

D+' &'

f@z@Bl
f@!@!@t

"z" "z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž


ž

APD 2100 M

Mitsubishi

D+ &''

5? -- !'

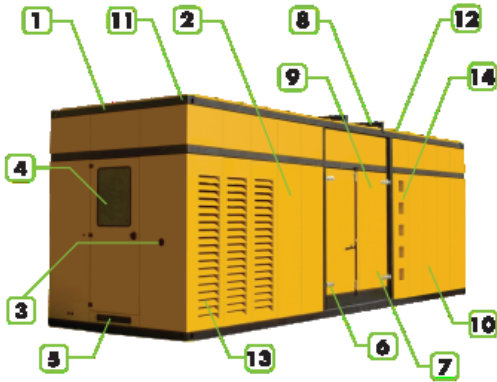

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200